



Type A System (for test masses)

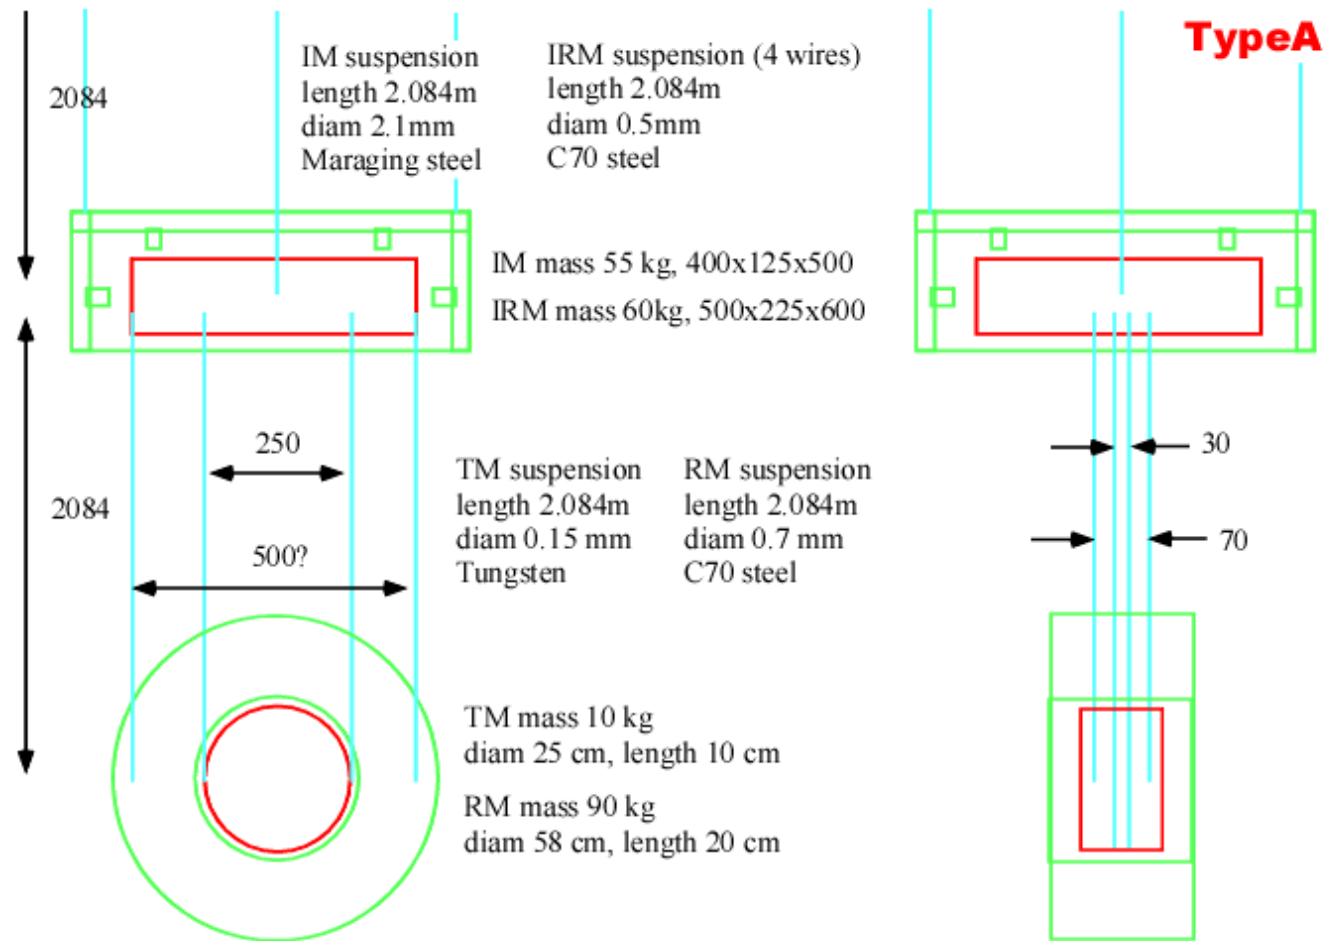

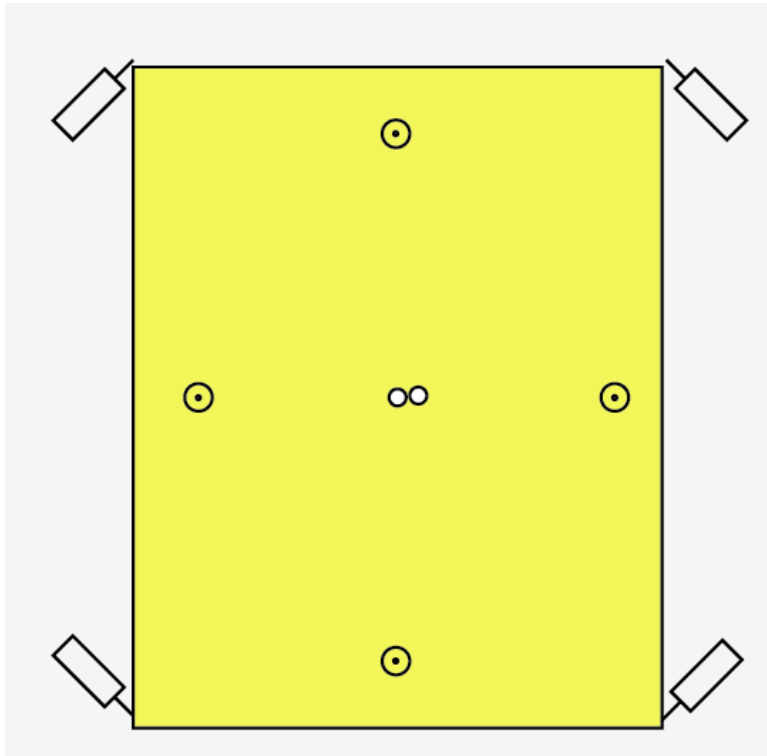

Positioning of sensor-actuators on the intermediate mass. Four vertical actuators are used for vertical, tip and roll modes. Four tangential sensor-actuator are used for yaw, longitudinal and transversal motion control